

## 5. Fourier analysis

- empirical transfer function estimate (ETF)
- discrete Fourier Transform of a finite-length signal
- properties of ETF

## Empirical transfer function estimate

consider a linear system with the representation

$$Y(\omega) = G(\omega)U(\omega)$$

we extend the frequency analysis to the case of multifrequency inputs

an estimate of the transfer function:

$$\hat{G}(\omega) = Y(\omega)U(\omega)^{-1}$$

is proposed and is called the *empirical transfer-function estimate (ETF)*

Estimates of  $Y(\omega)$ ,  $U(\omega)$  are given by the Fourier transform of the finite sequences:

$$Y_N(\omega) = \frac{1}{\sqrt{N}} \sum_{t=1}^N y(t)e^{-i\omega t}, \quad U_N(\omega) = \frac{1}{\sqrt{N}} \sum_{t=1}^N u(t)e^{-i\omega t}$$

# Discrete Fourier Transform (DFT)

the DFT of the length- $N$  time-domain sequence  $x[n]$  is defined by

$$X[k] = \frac{1}{\sqrt{N}} \sum_{n=0}^{N-1} x[n] e^{-i2\pi kn/N}, \quad 0 \leq k \leq N-1$$

the sequences  $X[k]$  are, in general, complex numbers even  $x[n]$  are real

the inverse DFT is given by

$$x[n] = \frac{1}{\sqrt{N}} \sum_{k=0}^{N-1} X[k] e^{i2\pi kn/N}, \quad 0 \leq n \leq N-1$$

## Matrix relation of DFT

Define  $W = e^{-i2\pi/N}$ , we can write the DFT in a matrix form as

$$\begin{bmatrix} X[0] \\ X[1] \\ X[2] \\ \vdots \\ X[N-1] \end{bmatrix} = \frac{1}{\sqrt{N}} \begin{bmatrix} 1 & 1 & 1 & \dots & 1 \\ 1 & W^1 & W^2 & \dots & W^{N-1} \\ 1 & W^2 & W^4 & \dots & W^{2(N-1)} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 1 & W^{N-1} & W^{2(N-1)} & \dots & W^{(N-1)(N-1)} \end{bmatrix} \begin{bmatrix} x[0] \\ x[1] \\ x[2] \\ \vdots \\ x[N-1] \end{bmatrix}$$

or

$$\mathbf{X} = \mathbf{D}\mathbf{x},$$

where  $\mathbf{D}$  is called the *DFT matrix*

The inverse DFT is given by  $\mathbf{x} = \mathbf{D}^{-1}\mathbf{X}$  and using the fact that

$$\mathbf{D}^{-1} = \mathbf{D}^*$$

( $\mathbf{D}$  is called an *orthogonal matrix*, i.e.,  $\mathbf{D}^*\mathbf{D} = I$ )

## Orthogonality of DFT matrix

the columns of DFT matrix are of the form:

$$\phi_k = (1/\sqrt{N}) [1 \quad W^k \quad W^{2k} \quad \dots \quad W^{k(N-1)}]^T,$$

or equivalently

$$\phi_k = (1/\sqrt{N}) [1 \quad e^{-i2\pi k/N} \quad e^{-i2\pi k \cdot 2/N} \quad \dots \quad e^{-i2\pi k(N-1)/N}]^T$$

use  $\langle \phi_l, \phi_k \rangle = \phi_k^* \phi_l$  and apply the sum of geometric series:

$$\langle \phi_l, \phi_k \rangle = \frac{1}{N} \sum_{n=0}^{N-1} e^{i2\pi(k-l)n/N} = \frac{1}{N} \cdot \frac{1 - e^{i2\pi(k-l)}}{1 - e^{i2\pi(k-l)/N}}$$

the columns of DFT matrix are therefore *orthogonal*

$$\langle \phi_l, \phi_k \rangle = \begin{cases} 1, & \text{for } k = l + rN, \quad r = 0, 1, 2, \dots \\ 0, & \text{for } k \neq l \end{cases}$$

# Frequency sampling of the Fourier transform

the Fourier transform of the length- $N$  sequence  $x[n]$  is given by

$$X(\omega) = \sum_{n=-\infty}^{\infty} x[n]e^{-i\omega n} = \sum_{n=0}^{N-1} x[n]e^{-i\omega n}$$

if we uniformly sampling  $X(\omega)$  on the  $\omega$ -axis between  $[0, 2\pi)$  by


$$\omega_k = 2\pi k/N, \quad 0 \leq k \leq N - 1,$$

then we have

$$X(\omega) \big|_{\omega=2\pi k/N} = \sum_{n=0}^{N-1} x[n]e^{-i2\pi kn/N}, \quad 0 \leq k \leq N - 1$$



frequency samples of  $X(\omega)$  of length- $N$  sequence  $x[n]$  at  $N$  equally spaced frequencies is *precisely* the  $N$ -point DFT  $X[k]$

# Computing DFT on MATLAB

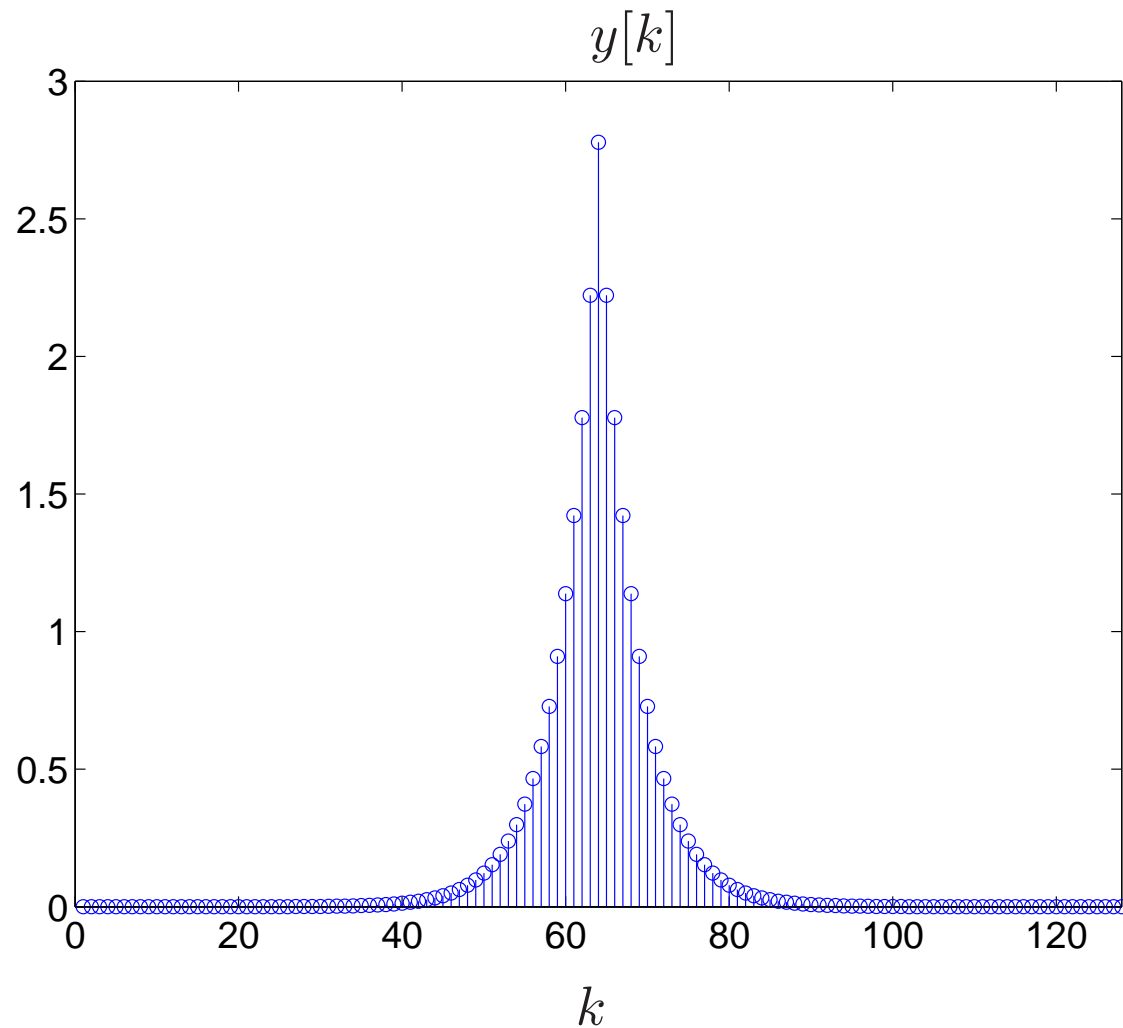

- $y[k] = a^{|k-64|}/(1 - a^2)$ , with  $a = 0.8$  (an autocorrelation sequence)

# Computing DFT on MATLAB

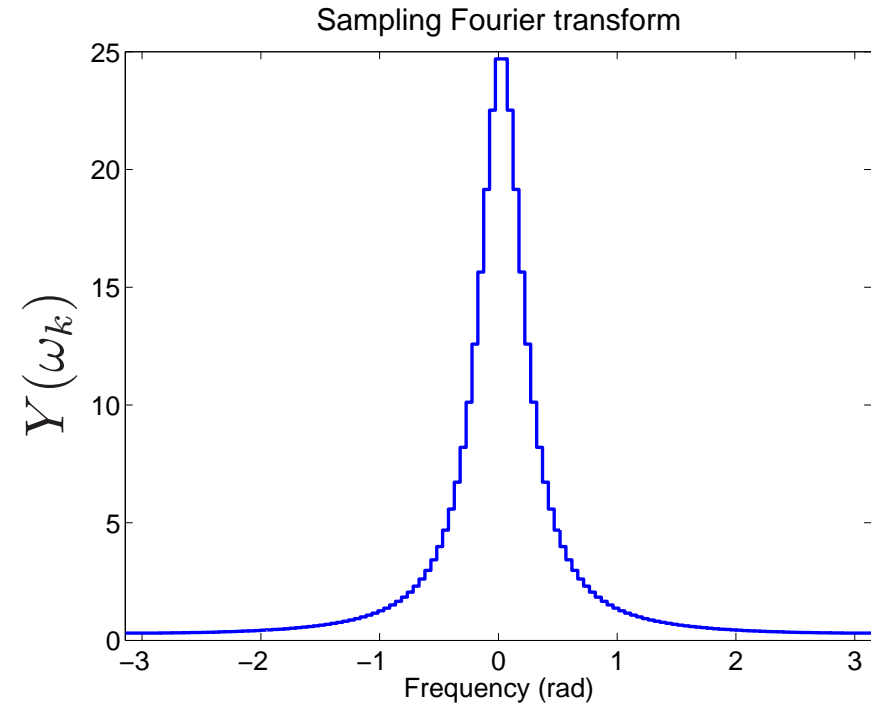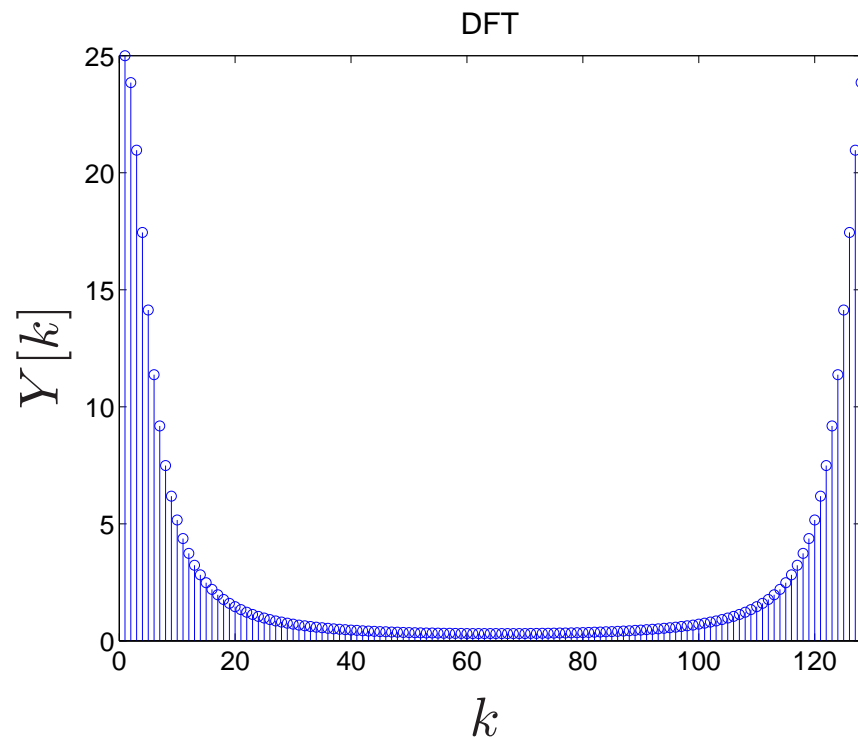

- Use `fft` command
- $y[k]$  is symmetric about 0, and so is  $Y[k]$
- Compare with  $Y(\omega) = 1/(1 + a^2 - 2a \cos \omega)$



## Transformation of DFT

let  $y(t)$  and  $u(t)$  are related by a strictly linear SISO system:

$$y(t) = G(q)u(t)$$

where  $q$  is the forward shift operator and  $G(q)$  is the transfer function

assume that  $|u(t)| \leq C$  for all  $t$  and let

$$Y_N(\omega) = \frac{1}{\sqrt{N}} \sum_{t=1}^N y(t)e^{-i\omega t}, \quad U_N(\omega) = \frac{1}{\sqrt{N}} \sum_{t=1}^N u(t)e^{-i\omega t}$$

then the DFTs of (windowed)  $y(t)$  and  $u(t)$  are related by

$$Y_N(\omega) = G(\omega)U_N(\omega) + R_N(\omega)$$

where

$$|R_N(\omega)| \leq \frac{2KC}{\sqrt{N}} \quad (\text{Ljung 1999, THM 2.1})$$

**Proof.** by definition

$$\begin{aligned} Y_N(\omega) &= \frac{1}{\sqrt{N}} \sum_{t=1}^N y(t) e^{-i\omega t} = \frac{1}{\sqrt{N}} \sum_{t=1}^N \sum_{k=1}^{\infty} g(k) u(t-k) e^{-i\omega t} \\ &= \frac{1}{\sqrt{N}} \sum_{k=1}^{\infty} g(k) e^{-i\omega k} \cdot \sum_{\tau=1-k}^{N-k} u(\tau) e^{-i\omega \tau} \end{aligned}$$

the last term on RHS is deviated from  $U_N(\omega)$  by

$$\begin{aligned} & \left| U_N(\omega) - \frac{1}{\sqrt{N}} \sum_{\tau=1-k}^{N-k} u(\tau) e^{-i\omega \tau} \right| \\ & \leq \left| \frac{1}{\sqrt{N}} \sum_{\tau=1-k}^0 u(\tau) e^{-i\omega \tau} \right| + \left| \frac{1}{\sqrt{N}} \sum_{\tau=N-k+1}^N u(\tau) e^{-i\omega \tau} \right| \leq \frac{2Ck}{\sqrt{N}} \end{aligned}$$

therefore,

$$\begin{aligned} |Y_N(\omega) - G(\omega)U_N(\omega)| &= \left| \sum_{k=1}^{\infty} g(k)e^{-i\omega k} \left( \frac{1}{\sqrt{N}} \sum_{\tau=1-k}^{N-k} u(\tau)e^{i\omega\tau} - U_N(\omega) \right) \right| \\ &\leq \frac{2}{\sqrt{N}} \sum_{k=1}^{\infty} |kg(k)Ce^{-i\omega k}| \end{aligned}$$

If we define

$$K = \sum_{k=1}^{\infty} k|g(k)| < \infty$$

then the inequality is bounded by

$$|Y_N(\omega) - G(\omega)U_N(\omega)| \leq \frac{2KC}{\sqrt{N}}$$

# Properties of ETFE

consider a linear model with disturbance

$$y(t) = G(q)u(t) + v(t)$$

from the previous page, we found that

$$\hat{G}(\omega) = G(\omega) + \frac{R_N(\omega)}{U_N(\omega)} + \frac{V_N(\omega)}{U_N(\omega)}$$

where  $V_N(\omega)$  denotes the Fourier transform of the disturbance term  
if we assume that  $v(t)$  has zero mean, then

$$\mathbf{E} \hat{G}(\omega) = G(\omega) + \frac{R_N(\omega)}{U_N(\omega)}$$

the estimate has a bias term which decays as  $1/\sqrt{N}$

## Properties of ETFE

It can be shown that (Ljung 1999, §6.3)

$$\mathbf{E}[(\hat{G}(\omega) - G(\omega))(\hat{G}(\lambda) - G(\lambda))^*] \\ = \begin{cases} \frac{S_v(\omega) + \rho_N}{|U_N(\omega)|^2}, & \text{if } \lambda = \omega \\ \frac{\rho_N}{U_N(\omega)U_N(-\lambda)}, & \text{if } |\lambda - \omega| = \frac{2\pi k}{N}, k = 1, 2, \dots \end{cases}$$

with  $|\rho_N|$  is bounded by  $1/N$  (up to a constant factor)

# Conclusions


## Periodic inputs

- $\hat{G}(\omega)$  is defined only for a fixed number of frequencies
- at these frequencies the ETFE is unbiased and its variance decays like  $1/N$

## Nonperiodic inputs

- $\hat{G}(\omega)$  is an asymptotically unbiased estimate of  $G(\omega)$  at many frequencies
- the variance of  $\hat{G}(\omega)$  does not decay with  $N$  but is given as the noise-to-signal ratio at the frequency in question as  $N$  increases
- this property makes the empirical estimate a crude estimate in most cases in practice


# Example

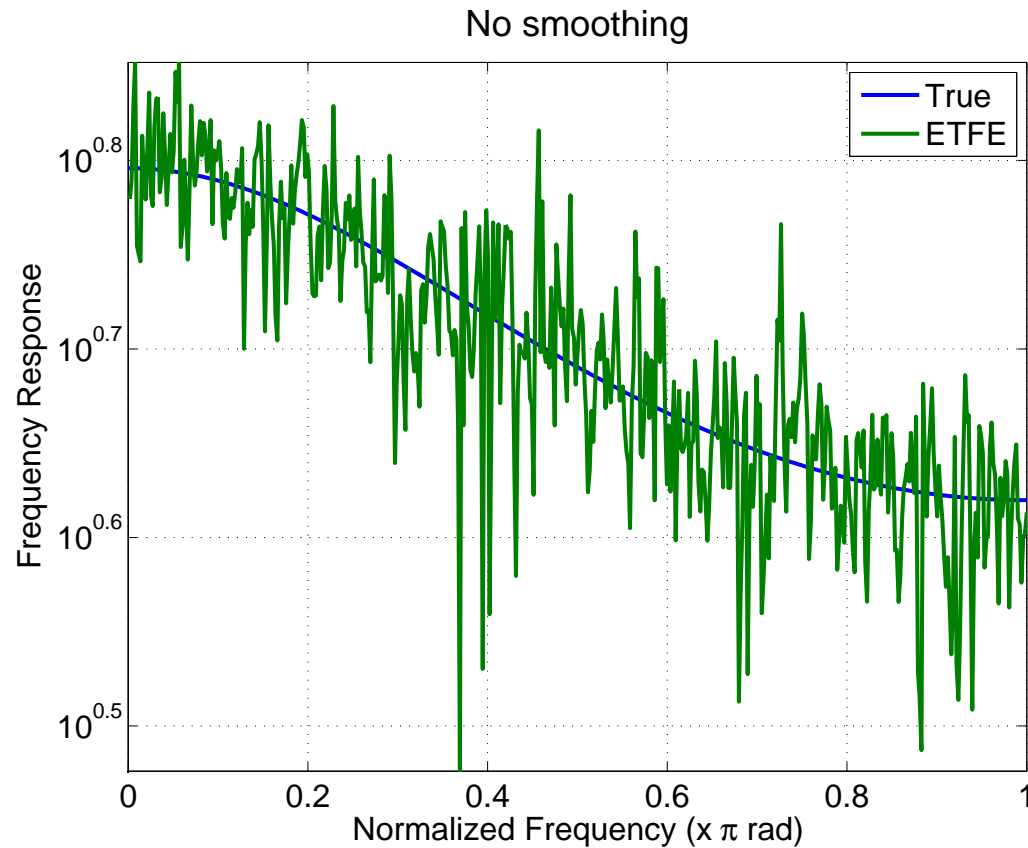

- $G(z) = \frac{5}{z-0.2}$ , white noise input with power 1, additive noise variance is 0.25
- Use `etfe` command in System Identification Toolbox

# Example

Smoothing with a window of length 32

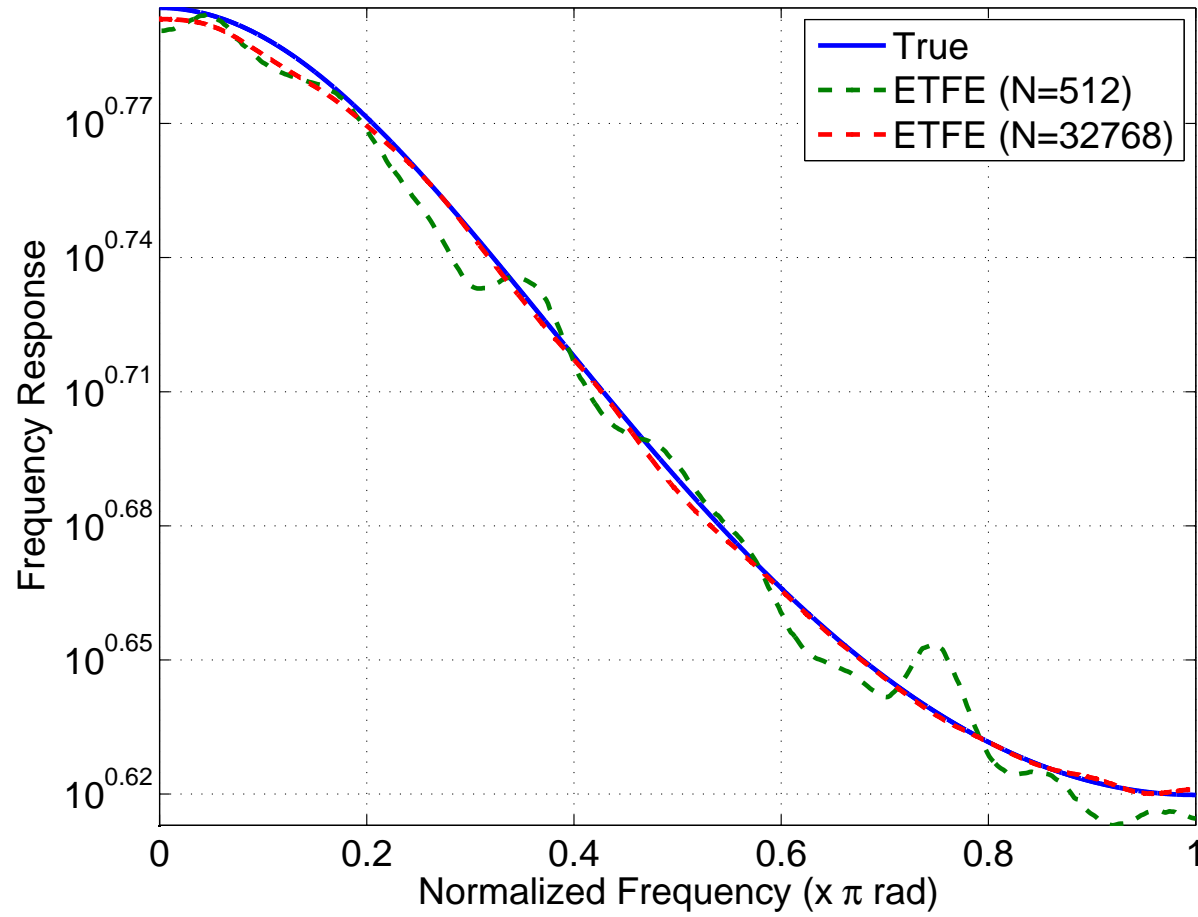



# References

Chapter 6 in

L. Ljung, *System Identification: Theory for the User*, Prentice Hall, Second edition, 1999

Chapter 5 in

S. K. Mitra, *Digital Signal Processing*, McGraw-Hill, International edition, 2006